

DC Motor


有刷马达

选项

- 1) 电刷
- 2) 碳刷
- 3) 空心杯

Option

1. Metal Brush DC Motor
2. Carbon Brush DC Motor
3. Coreless DC motor

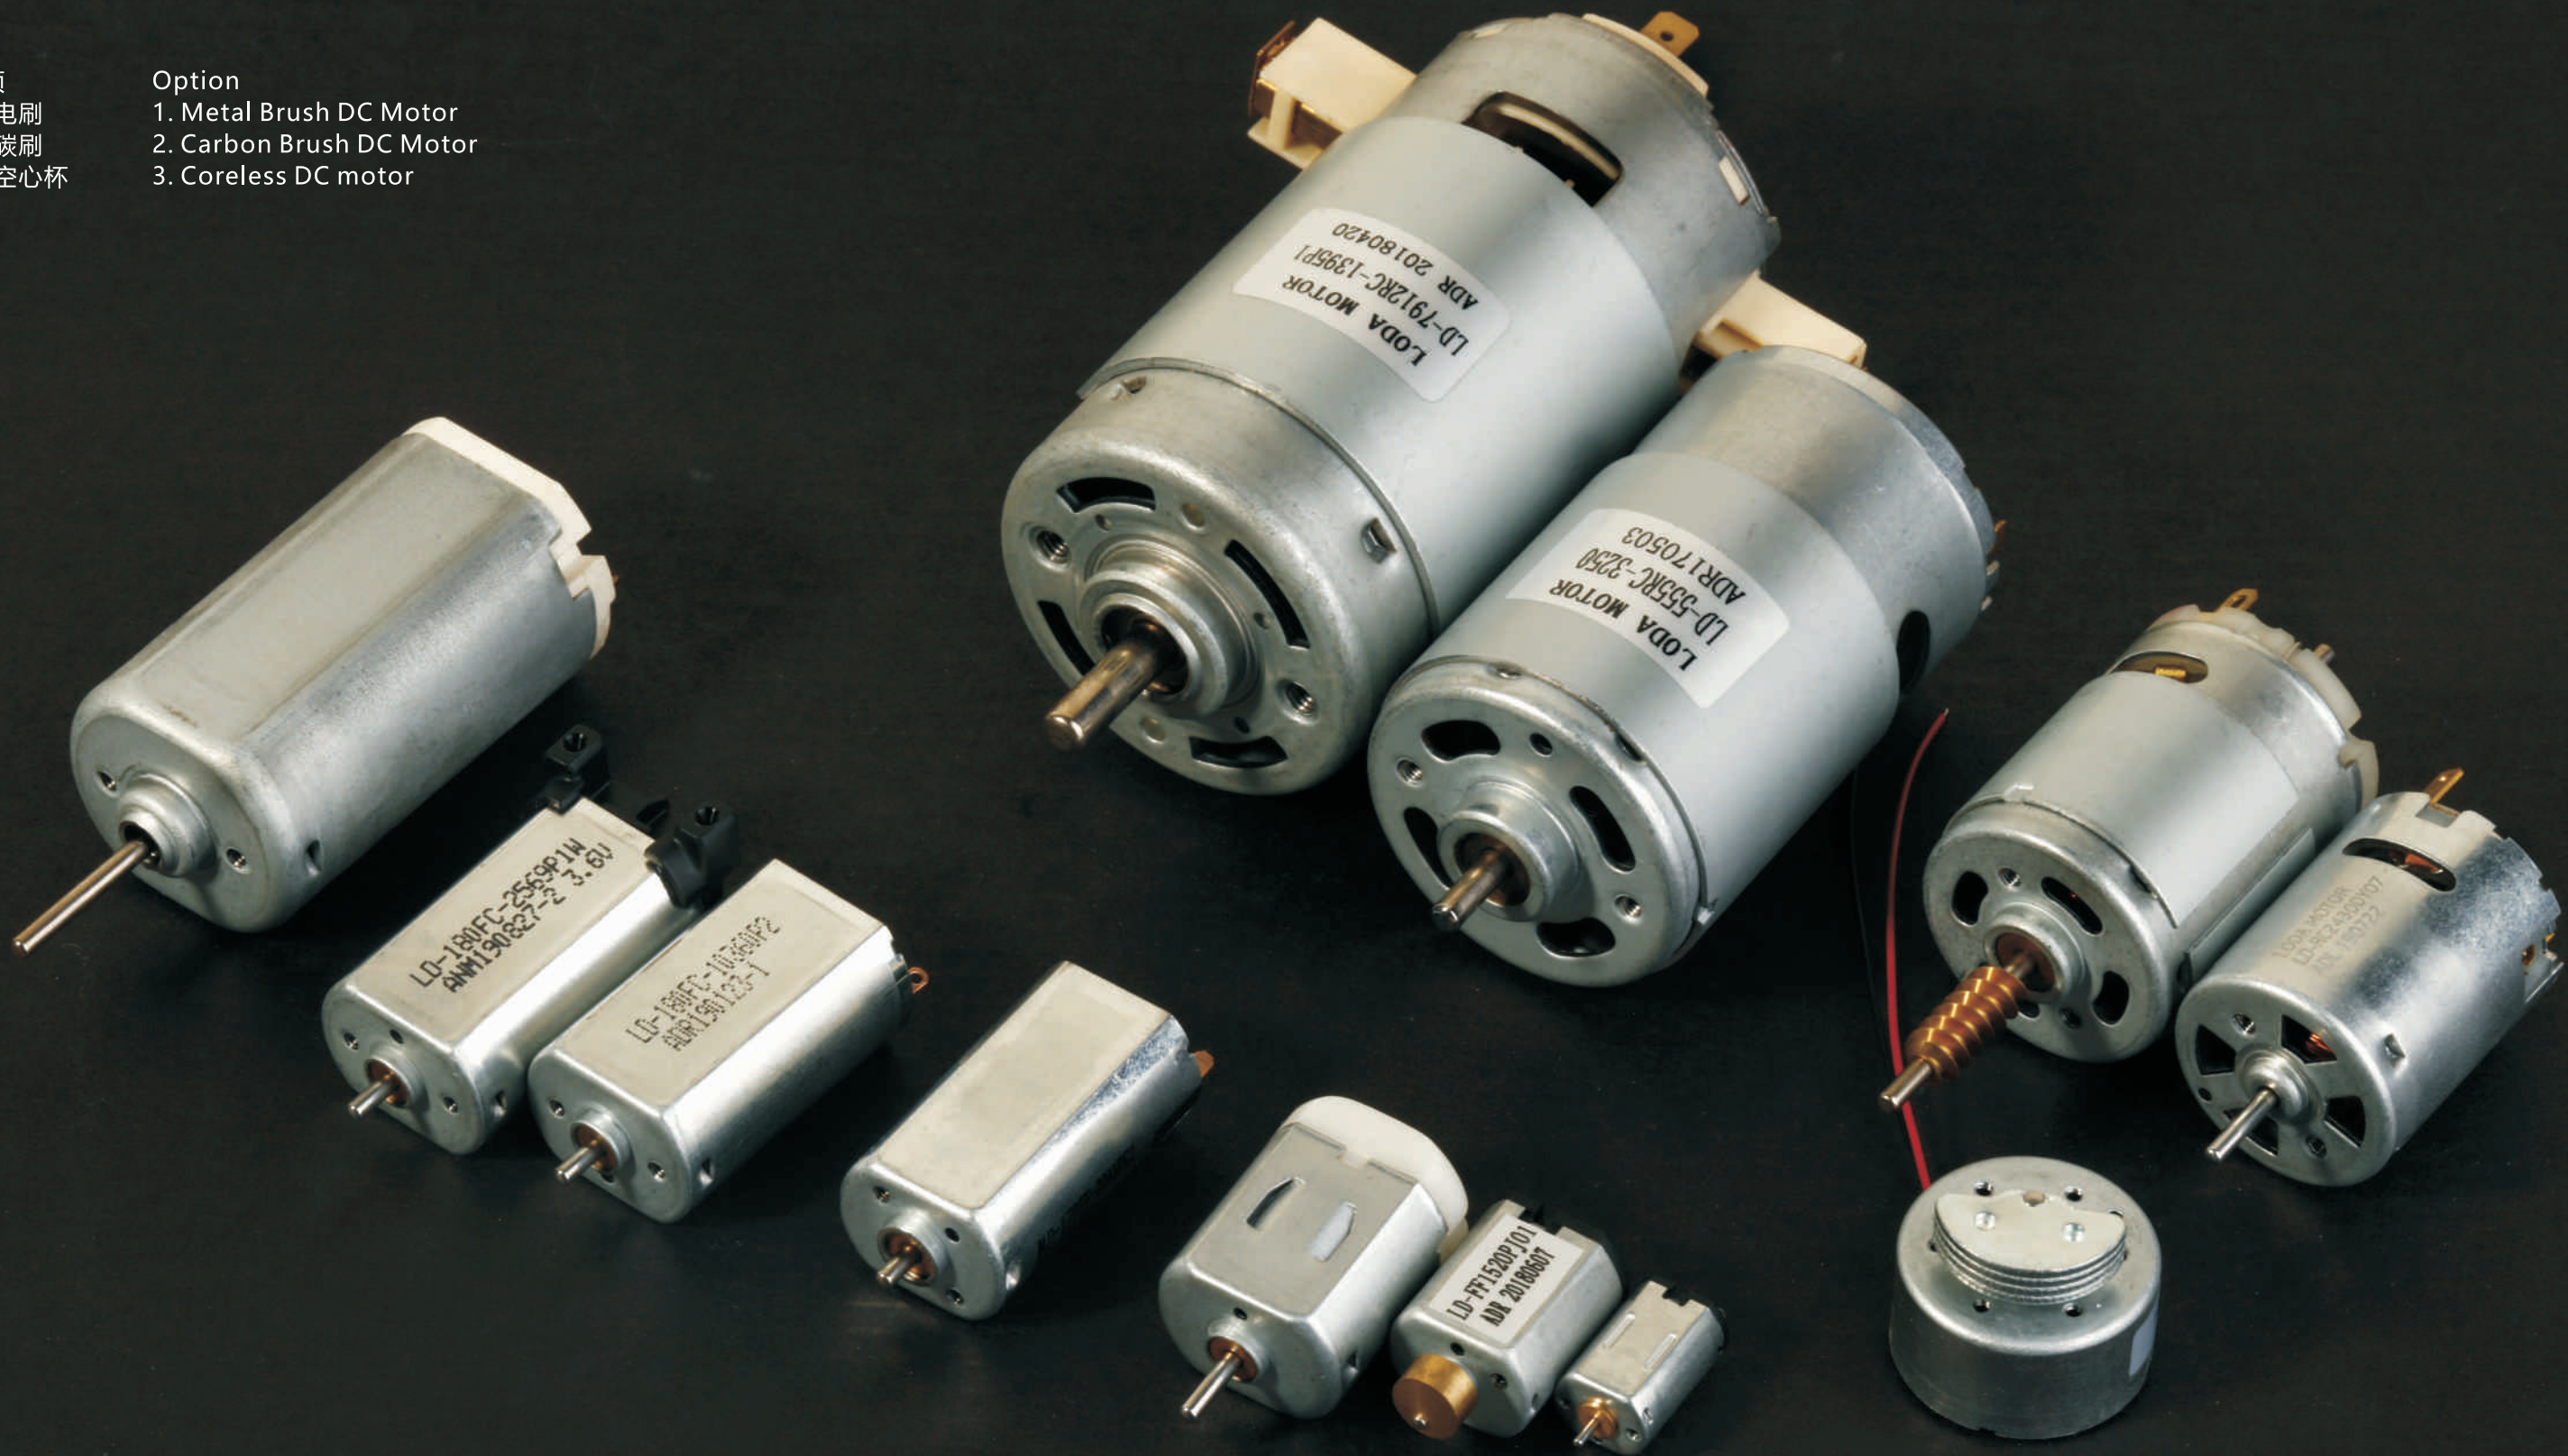


LD-FF0810(K10FF)

应用：智能锁，玩具等

DC MOTOR

Application: Intelligent lock, Toy

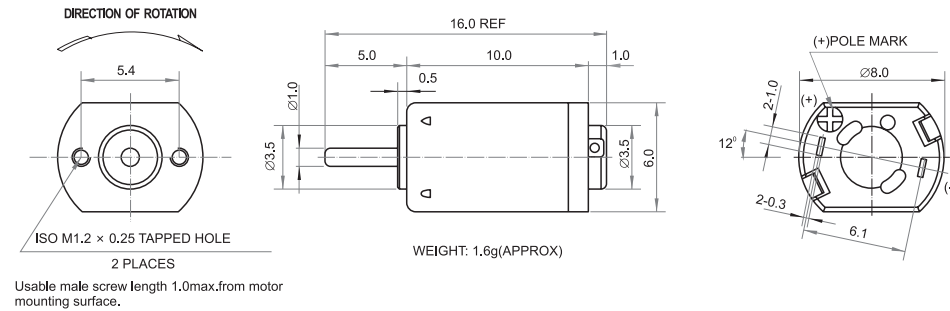


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FF0810-5Z125	2.5~3.5	3.0	20500	0.057	13800	0.12	0.6	0.085	23.61%	1.9	0.25

LD-FF1015(M20FF)

应用：视听设备，玩具，医疗器械等

DC MOTOR

Application: Audio and Visual Equipments, Toy, Medical Equipment

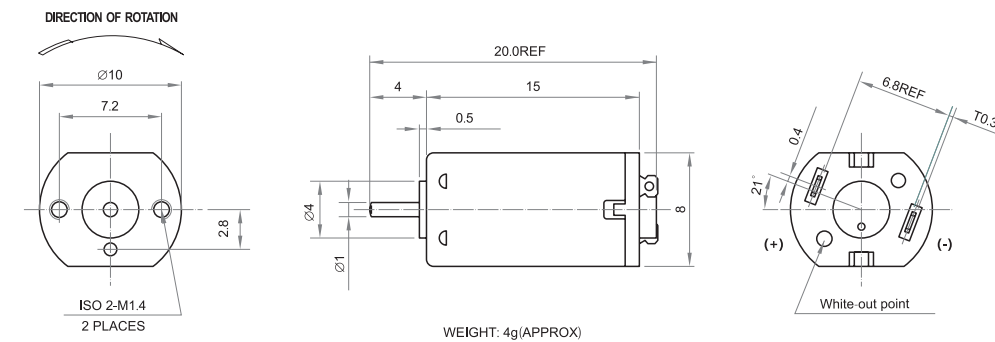


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FF1015-1250	1.0~1.8	1.5	17200	0.13	12862	0.37	1.70	0.22	40.09%	6.75	1.11

LD-RF1230(N60RF)

应用：电动牙刷，智能锁，玩具等

DC MOTOR

Application: Electric toothbrush, Intelligent lock, Toy

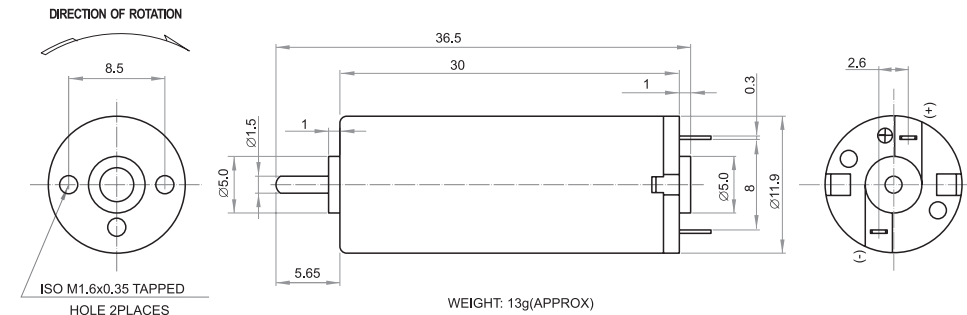


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RF1230-1858	0.8~3.0	1.5	7900	0.09	5500	0.39	6	0.34	58.12%	65	22
LD-RF1230-1955	1.0~3.0	2.4	12700	0.13	10100	0.51	6	0.82	67.00%	67	32
LD-RF1230-1898	0.8~3.0	1.5	9200	0.114	7222	0.39	4	0.3	52.59%	18.6	1.32

LD-FF1619(O30FF)

应用：剪毛器，电动牙刷，视听设备等

DC MOTOR

Application: Shearer, Audio and Visual Equipments, Electric toothbrush

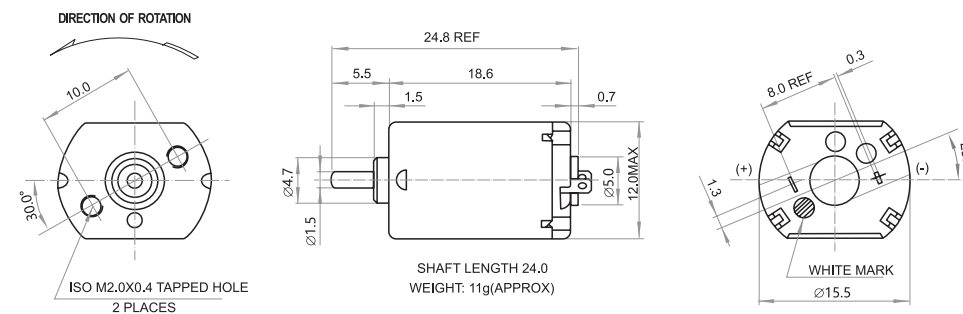


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FF1619-10180	3.5~6.0	5V	11700	0.050	9230	0.19	0.50	0.48	50.53%	2.35	0.70
LD-FF1619-09210	1~5	5V	10500	0.046	8140	0.16	0.44	0.37	46.25%	1.96	0.55
LD-FF1619-08250	1~6	6V	10500	0.041	8020	0.13	0.43	0.36	46.15%	1.81	0.43

LD-FF1627(050FF)

应用：视听设备，玩具，医疗器械等

DC MOTOR

Application: Audio and Visual Equipments, Toy, Medical Equipment

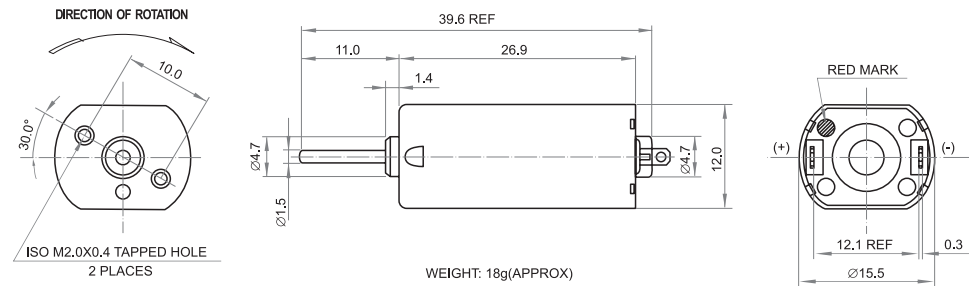


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FF1627-2043V	2.4~10.8	1.2	6100	0.13	4728	0.44	6.24	0.30	56.74%	27.73	1.53

LD-RF1723(130RF)

应用：智能锁，玩具等

DC MOTOR

Application: Intelligent lock, Toy

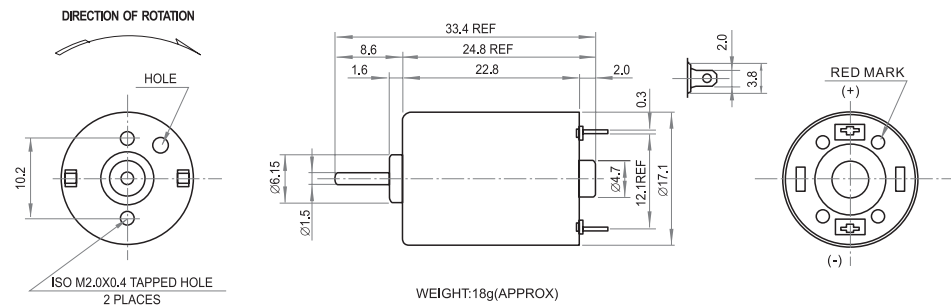


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RF1723-12250	2.0~7.5	3.5V	4700	0.028	3700	0.11	4.9	0.19	49.35%	24	0.41
		6V	8100	0.035	6800	0.16	7.0	0.49	51.04%	42	0.70
LD-RF1723-2860	1.0~1.5	1.5V	9200	0.14	7600	0.66	7.0	0.55	55.56%	43	3.18

LD-FE2025(130FE)

应用：智能锁，玩具等

DC MOTOR

Application: Intelligent lock, Toy

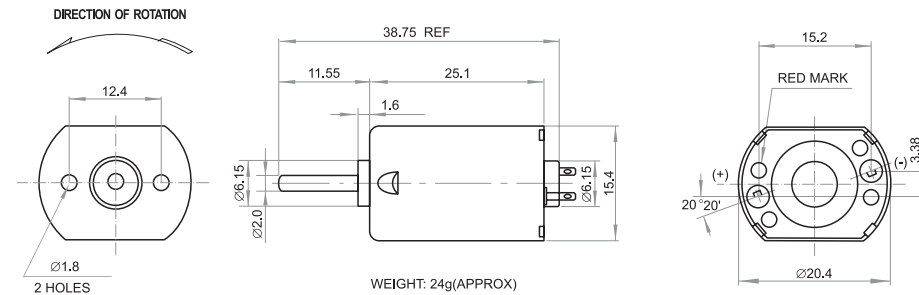


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-130FE-2085	0.8~2.4	1.5	7200	0.16	5332	0.46	5.49	0.30	43.90%	21.18	1.30

LD-FF2025(130FF)

应用：智能锁，玩具等

DC MOTOR

Application: Intelligent lock, Toy

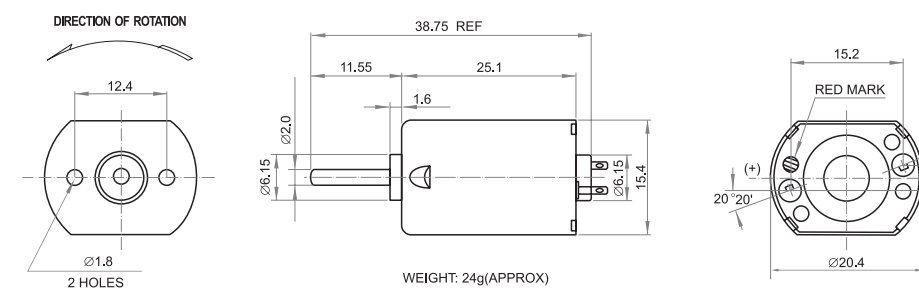


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FF2025-2860	1.0~1.5	1.2V	7400	0.21	5800	0.81	7.5	0.45	46.3%	38	3.10
LD-FF2025-11340	3~12	6V	4800	0.030	3800	0.12	8.5	0.33	45.83%	44	0.46
		9V	7300	0.035	5900	0.15	12	0.73	54.07%	67	0.68
LD-FF2025-14230	2.0~8.0	3V	3600	0.035	2900	0.12	6.0	0.18	50%	36	0.53
		5V	6000	0.045	4900	0.20	11	0.55	55%	60	0.90

LD-FF1932(170FF)

应用：美容，电动牙刷，医疗器械等

DC MOTOR

Application: Beauty apparatus, Electric toothbrush, Medical Equipment

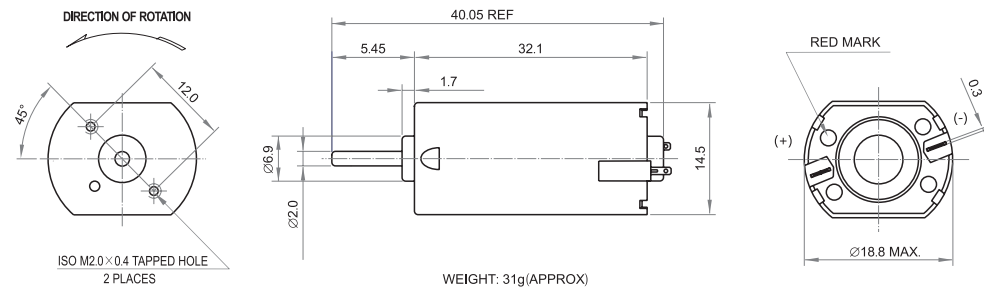


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FF1932-2082	2.5~4.5	3.6	7300	0.10	5979	0.45	17.17	1.05	64.68%	94.90	2.05
LD-FF1932-2451	1.8~3.0	2.4	8300	0.17	6760	0.74	17.46	1.21	68.07%	94.07	3.25
LD-FF1932-2841	1.8~3.4	2.4	10000	0.23	8155	1.00	20.13	1.68	69.96%	109.09	4.44

LD-FC2025(140FC)

应用：汽车产品

DC MOTOR

Application: Automotive equipment

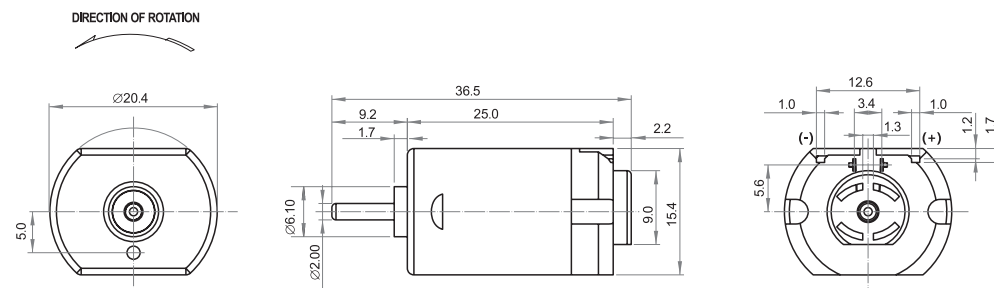



MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2025-09430	5~17	13.5	8000	0.044	6300	0.134	15.00	0.97	53.63%	70.59	0.47

LD-FC2025(140FC)

应用：汽车产品

DC MOTOR

Application: Automotive equipment

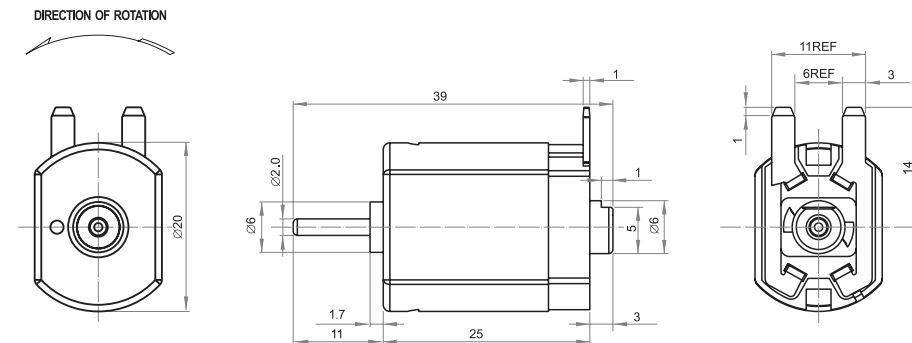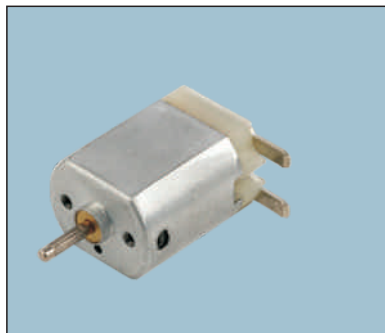


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2025-07800	5~17	13.5	3600	0.025	2300	0.075	15.00	0.35	34.98%	41.54	0.16

LD-FC2032(180FF)

应用：汽车产品

DC MOTOR

Application: Automotive equipment

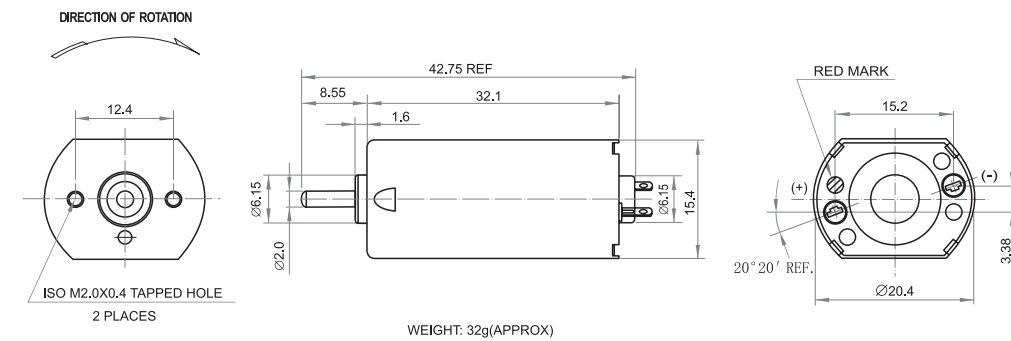


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2032-13180	12.5~20	15.0	13700	0.07	11314	0.34	29.83	3.46	67.67%	171.25	1.62
LD-FC2032-2569	2.5~4.5	3.6	8800	0.15	7302	0.72	22.85	1.71	65.98%	134.20	3.51

LD-FC2218

应用：园艺工具，剃须刀等

DC MOTOR

Application: Gardening tool, Shavers

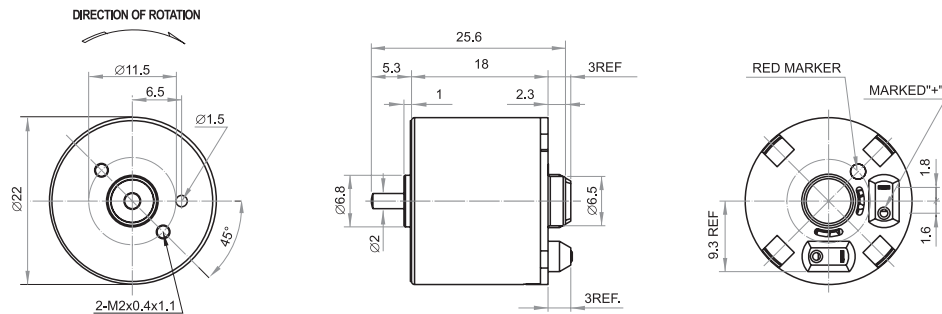


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2218	2V~6V	3.5V	6300	0.12	5400	0.88	3	1.7	55.19%	21	6.5

LD-FC2230

应用：园艺工具，剃须刀等

DC MOTOR

Application: Gardening tool, Shavers

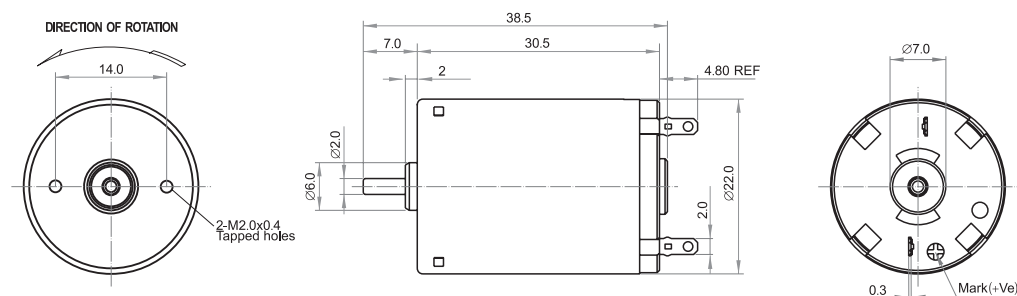


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2230-18140	6~24	12.5	10256	0.123	6361	1.403	153	9.99	56.97%	402.87	3.49

LD-RF2420(310FF)

应用：美容，电动牙刷，医疗器械等

DC MOTOR

Application: Beauty apparatus, Electric toothbrush, Medical Equipment

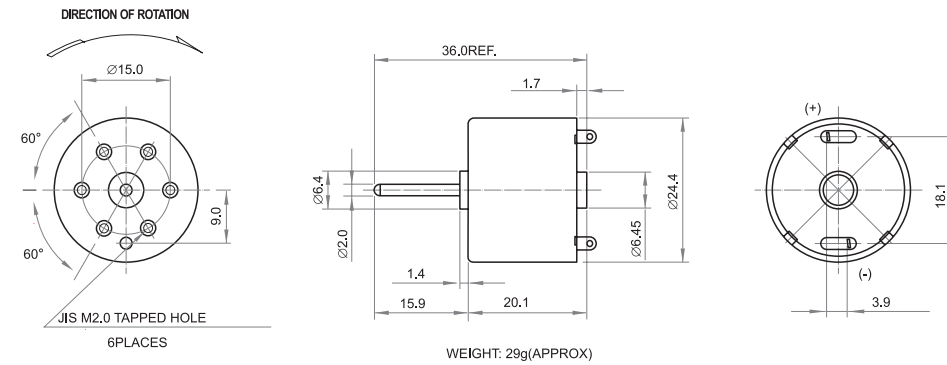


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RF2420-11400	1.0~6.0	2.5V	2800	0.017	2200	0.060	3.26	0.07	46.67%	48.0	0.65
LD-RF2420-10470	1.0~6.0	3.5V	3400	0.017	2670	0.063	3.85	0.11	49.89%	48.2	0.59
LD-RF2420-12380	1.7~7.0	4.0V	3050	0.035	2550	0.095	6.00	0.075	19.74%	42.0	0.35

LD-RF2420(330RF)

应用：电动阀门，回单柜，喷香机，手摇充电器等

DC MOTOR

Application: Electric Valve, Charger, Perfume spray machine

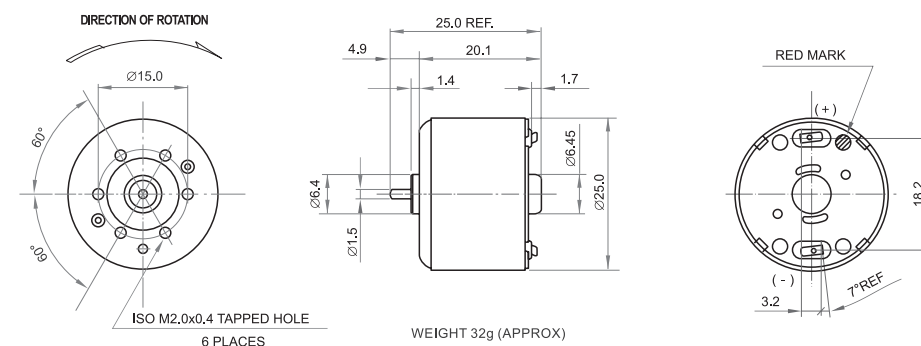


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RF2420-11360	2.0~6.0	3.4V	3400	0.015	2700	0.066	4.3	0.12		23	0.29
LD-RF2420-09500	2.0~8.0	4.5V	3300	0.010	2600	0.044	4.0	0.11		23	0.20
LD-RF2420-13250	1.2~6.0	2.2V	3200	0.020	2500	0.080	4.0	0.10		22	0.36
LD-RF2420-16170	1.2~4.5	1.5V	3200	0.030	2700	0.12	3.5	0.097		21	0.56

LD-FC2427(260FC)

应用：汽车产品

DC MOTOR

Application: Automotive Products

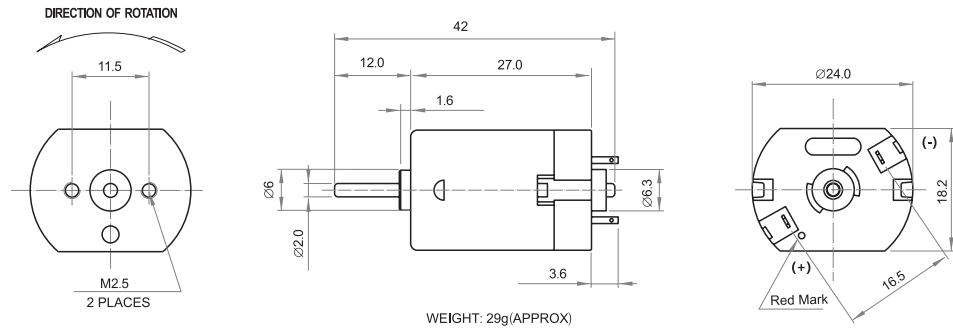


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2427-09290	11~13	12.0	8200	0.07	6077	0.20	15.82	0.99	41.65%	61.09	0.57

LD-FC2431(280FC)

应用：汽车产品

DC MOTOR

Application: Automotive Products

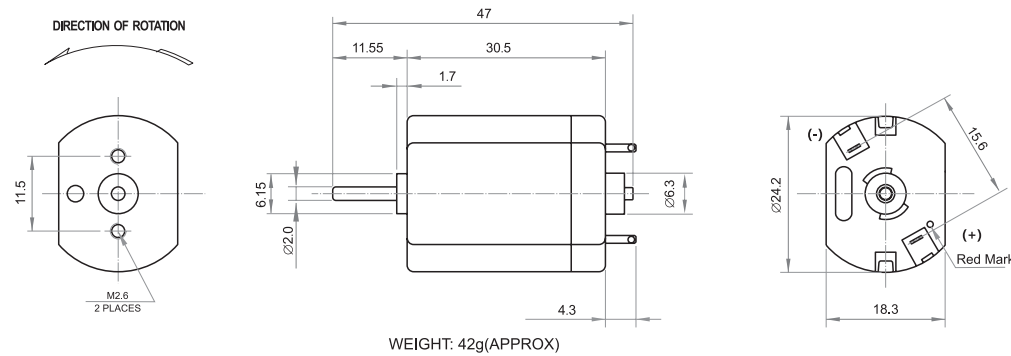


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2431-2695L	7.2~8.8	8.0	9800	0.16	8410	0.97	63.16	5.45	70.39%	445.45	5.86
LD-FC2431-3254	2.4~4.5	3.6	10000	0.26	8475	1.42	38.90	3.38	66.10%	255.00	7.90

LD-RF2430(370RF)

应用：汽车产品

DC MOTOR

Application: Automotive Products

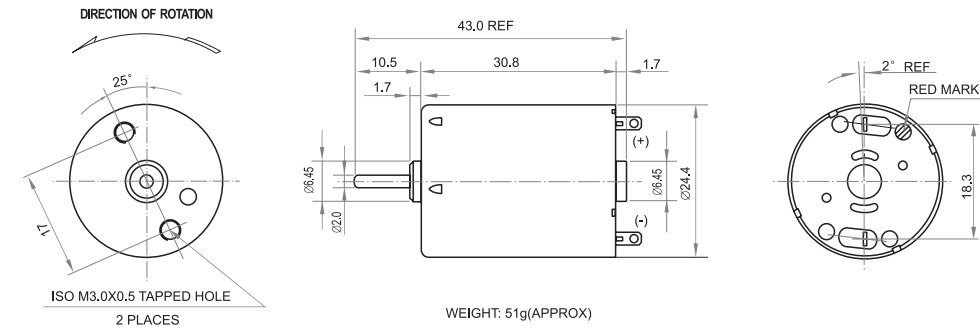


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RF2430-10800	12~30	24V	5100	0.015	4300	0.082	26	1.15	49.35%	170	0.45
LD-RF2430-18260	6~18	12V	7900	0.050	5400	0.11	75	4.15	51.04%	240	0.24
LD-RF2430-081050	12~30	24V	3900	0.010	3100	0.047	19	0.60	55.56%	110	0.22

LD-RC2430(370RC)

应用：吸尘器

DC MOTOR

Application: Vacuum cleaner

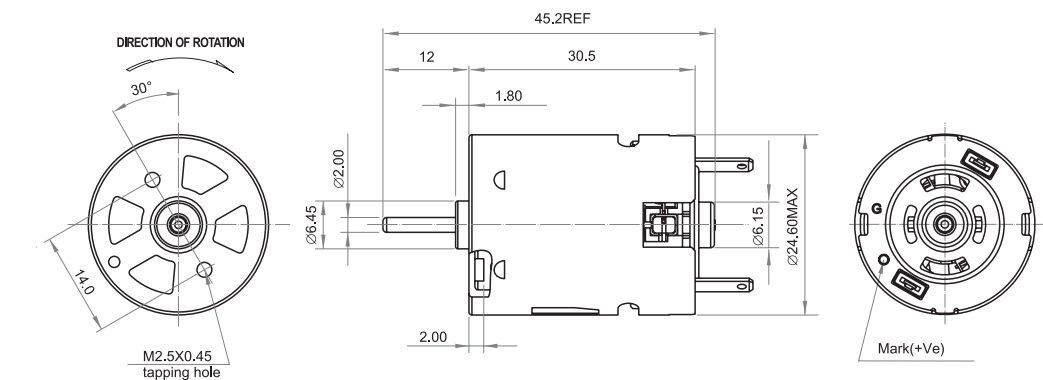


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC2430	8V~18V	15.6V	14300	0.39	11600	1.27	10.6	12.8	64.61%	55.5	5.4
	6V~16V	13V	15540	0.36	12600	1.69	10.96	14.5	66.00%	58.3	7.29

LD-RC2431(280RC)

应用：智能锁，玩具等

DC MOTOR

Application: Intelligent lock, Toy

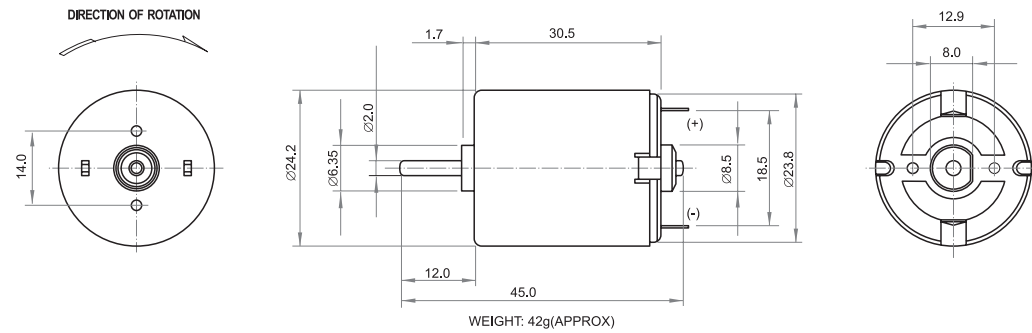


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC2431-2865	2.4 ~ 3.0	3.0V	9200	0.16	7800	0.85	20	1.60	62.75%	130	4.7
LD-RC2431-2480	1.5 ~ 4.5	3.0V	6600	0.14	5510	0.62	15.8	0.96	51.61%	92	2.93
LD-RC2431-20120	3.0 ~ 6.0	3.0V	5000	0.07	4100	0.33	13	0.55	55.55%	75	1.52
LD-RC2431-2865	2.4 ~ 6.0	6.0V	14400	0.34	11890	1.61	41.20	5.02	51.97%	236	7.61
LD-RC2431-21120	9.0 ~ 14.0	12V	15500	0.15	13300	0.91	41.8	5.81	53.21%	294.2	5.49

LD-RC2833(360RC/365RC)

应用：吸尘器，水泵，按摩器等

DC MOTOR

Application: Water Pump, Vacuum cleaners, Massager

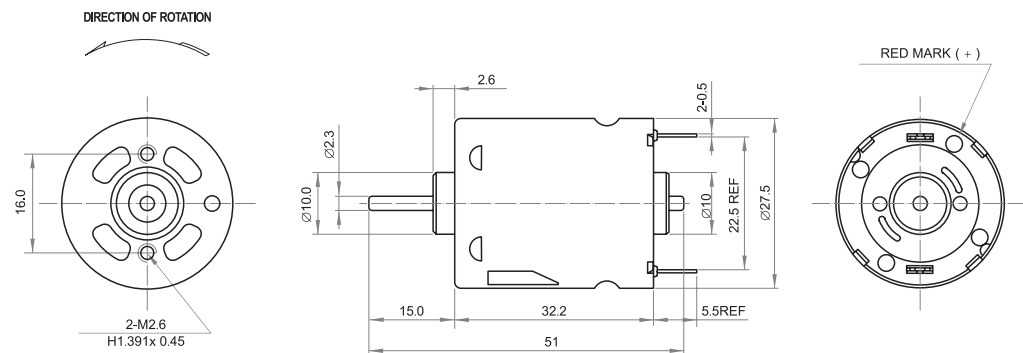


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC2833-15160	9 ~ 24	12V	4755	0.107	4120	0.255	39.56	1.67	54.68%	296.23	1.22
LD-RC2833-18110	12 ~ 30	24V	14705	0.156	13894	0.522	50.00	7.13	56.93%	906.60	6.79
LD-RC2833-21127	6 ~ 24	12V	12274	0.178	10140	0.896	68.00	7.08	65.83%	391.11	4.31
LD-RC2833-18136	12 ~ 24	18V	17261	0.166	15427	0.619	46.00	7.29	65.38%	432.94	4.43

LD-RC2838(385RC)

应用：吸尘器，风筒，打印机等

DC MOTOR

Application: Vacuum cleaners, Hair dryers, Printers

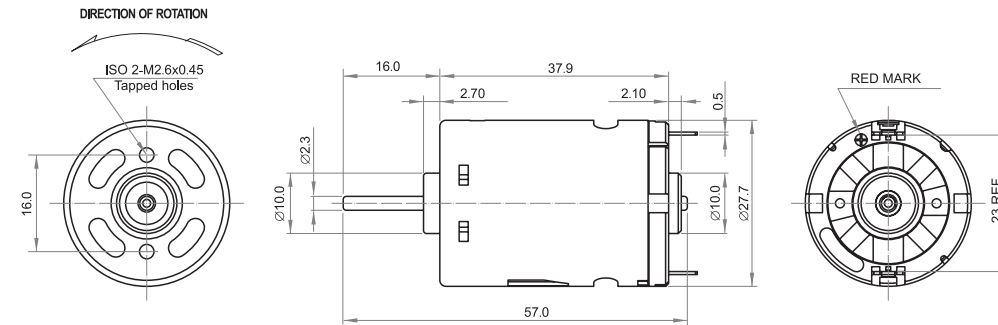


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC2838-2270	6 ~ 38	24	19714	0.195	16612	1.236	119.0	20.29	68.41%	756.28	6.81
LD-RC2838-1997	6 ~ 38	32	19222	0.143	15654	1.112	146.8	23.59	66.30%	790.86	5.36

LD-RC2838(380RC/385RC)

应用：吸尘器，风筒，电动工具等

DC MOTOR

Application: Vacuum cleaners, Hair dryers, Electric tool

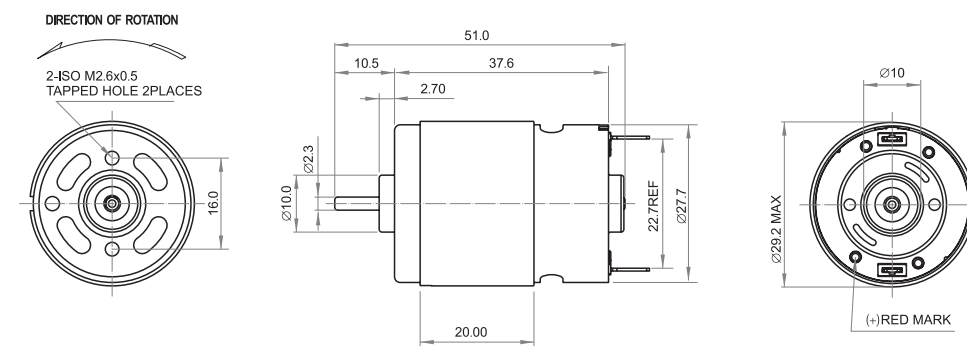


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC2838-1986	6.0~24	18	11947	0.077	10728	0.723	86.7	9.55	73.37%	849.72	6.41
LD-RC2838-12230	12~30	24	5126	0.025	4235	0.195	70.00	3.04	65.03%	402.72	1.00
LD-RC2838-3050	3.0~9.0	7.2	14200	0.502	11969	2.692	116.38	14.30	73.78%	740.74	14.44
LD-RC2838-13380	6.0~24	12	7303	0.157	6615	0.457	51.00	3.46	63.15%	541.36	3.34

LD-FC2847

应用：家用电器，个人护理等

DC MOTOR

Application: Domestic appliance, Personal care

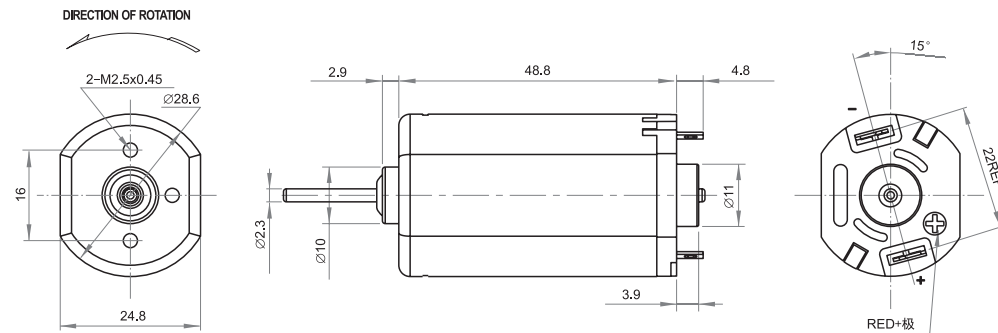


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FC2847	6V~12V	8V	7000	0.22	5800	1.2	100	5.95	61.98%	582	5.93

LD-RC2847(390RC/395RC)

应用：吸尘器，风筒，玩具等

DC MOTOR

Application: Vacuum cleaner, Hair dryer, Toy

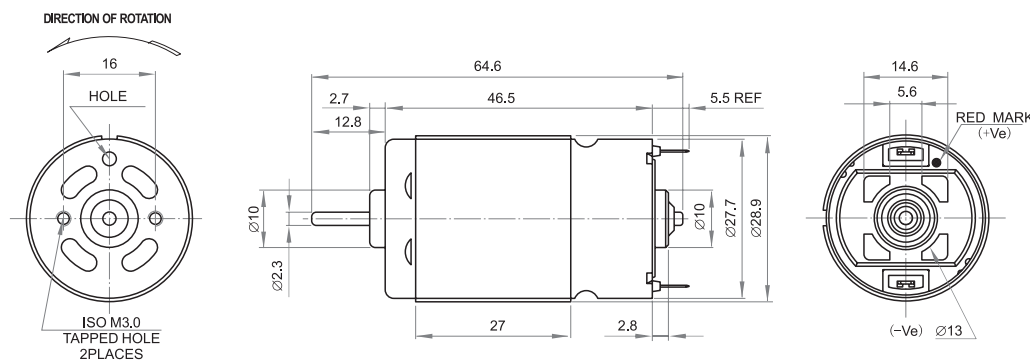


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC2847-2658	8V~16V	14.4V	8400	0.12	7400	0.83	114.2	8.66	72.46%	910	5.85

LD-FF2915(320FF)

应用：美容，电动牙刷，医疗器械等

DC MOTOR

Application: Beauty apparatus, Electric toothbrush, Medical Equipment

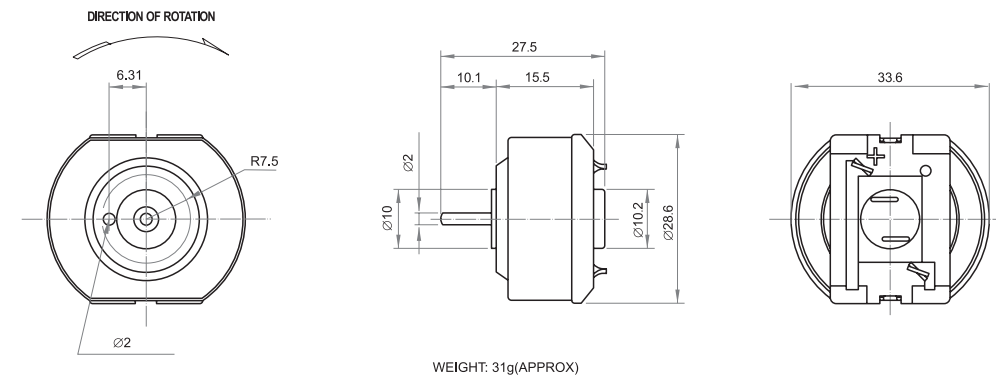


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-320FF-20133	1.5~3.5	2.7	5400	0.11	4198	0.37	13.03	0.56	55.66%	58.50	1.30
LD-320FF-22133	1.5~3.5	2.4	5500	0.10	4430	0.43	13.37	0.61	59.40%	68.75	1.77

LD-RC3650(540RC/545RC)

应用：吸尘器，风筒，电动工具等

DC MOTOR

Application: Vacuum cleaners, Hair dryers, Electric tool

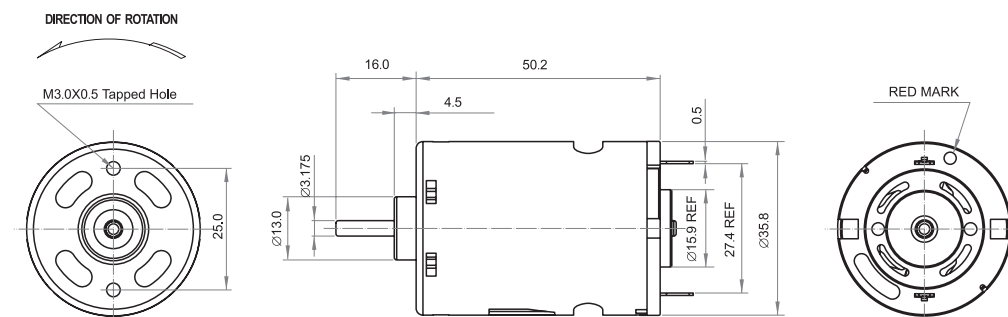


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC3650-4525	6.0~12	6.0	8756	1.020	6825	3.350	190.00	13.31	66.23%	861.54	11.59
LD-RC3650-5019	12~24	12	18542	0.886	15287	4.365	228.80	35.91	68.55%	133.35	20.70
LD-RC3650-2368	12~30	28.8	13127	0.229	11112	1.199	204.00	23.27	67.39%	1328.99	6.55
LD-RC3650-30130	6.0~24	12	5790	0.203	5033	1.021	153.00	7.91	64.52%	1170.24	6.46
LD-RC3650-25115	12~30	24	12974	0.230	11313	1.635	237.90	27.63	70.41%	1858.23	11.20

LD-RC3657(550RC/555RC)

应用：吸尘器，风筒，电动工具等

DC MOTOR

Application: Vacuum cleaners, Hair dryers, Electric tool

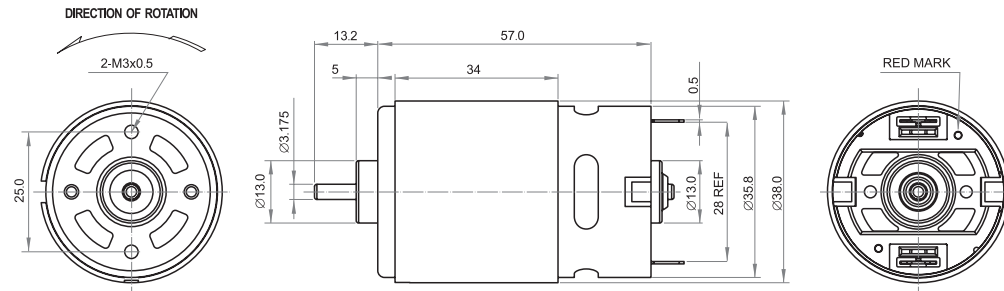


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC3657-3550	6.0~15	12	9758	0.460	9063	1.732	143.00	13.30	64.01%	2007.76	18.32
LD-RC3657-27115	12~30	24	8520	0.200	7437	1.380	3.5.00	23.29	70.31%	2399.45	9.48
LD-RC3657-6015	6.0~12	6.0	7934	0.811	6368	7.893	510.00	33.34	70.40%	2583.87	36.69
LD-RC3657-25115	12~30	24	12974	0.230	11313	1.635	237.90	27.63	70.41%	1858.23	11.20

LD-RC4260(750RC)

应用：电动工具等

DC MOTOR

Application: Electric tool

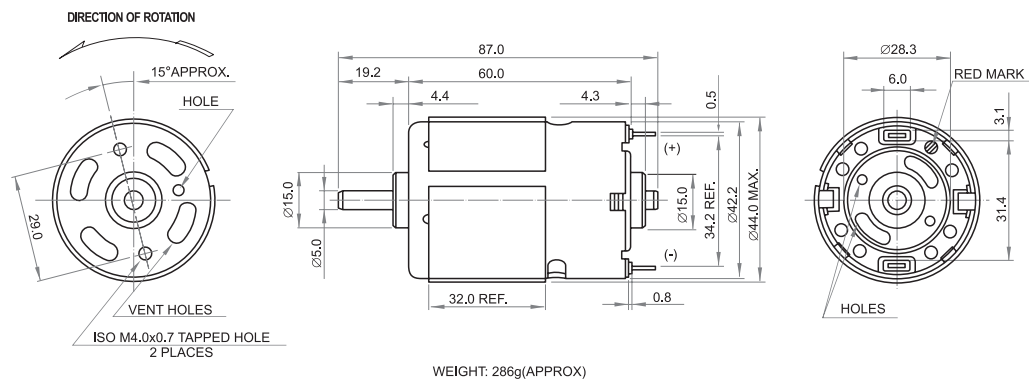


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC4260-A	4.5~12.0	6.0V	13300	2.00	11400	12.20	452	52.8	72.13%	3200	74.1
	6.0~15.0	9.6V	18400	1.80	15800	11.10	487	79.1	74.23%	3500	68.6
	6.0~18.0	12.0V	12300	1.00	10600	6.20	504	54.8	73.55%	3600	38.1

LD-RC4267(775RC)

应用：电动工具等

DC MOTOR

Application: Electric tool

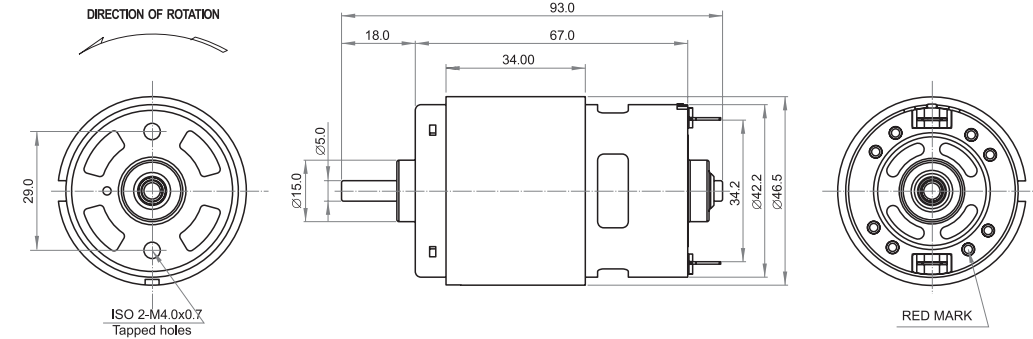


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC4267-8012	6~14	12.0	15856	2.363	13917	13.689	816.00	116.58	70.97%	6672.77	94.98
LD-RC4267-7515	6~20	18.0	19145	1.890	16938	13.216	1020.00	177.36	74.56%	8848.16	100.14

LD-FB7674ML01

应用：吸尘器，喷雾器等

DC MOTOR

Application: Vacuum cleaner, Sprayer

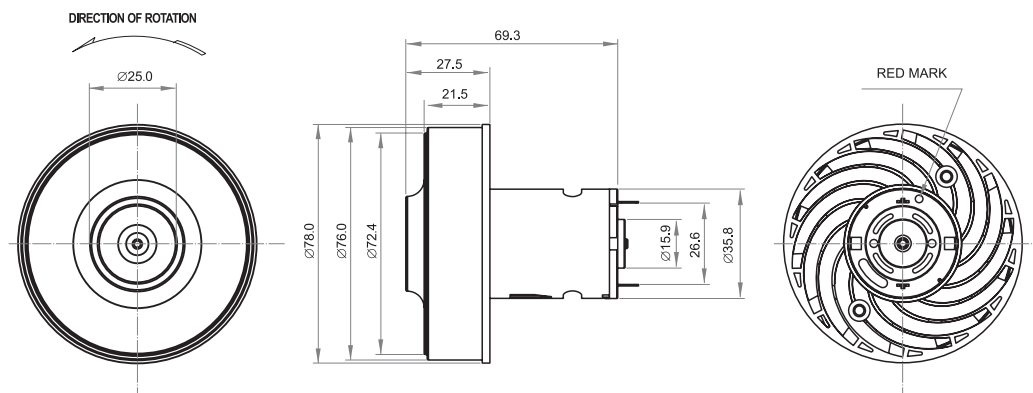


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-FB7674ML01	10~14	12.0	18492	0.90	15256	4.25	175.20	27.44	53.76%	1001.33	20.06

LD-RC4276(7712RC)

应用：吸尘器，电动工具等

DC MOTOR

Application: Vacuum cleaner, Electric tool

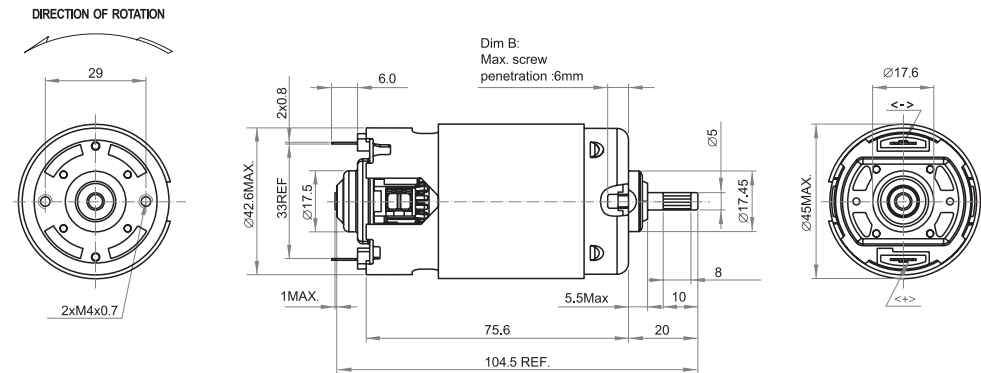


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC4276-1392	220~350	331.2	10259	0.060	7256	0.679	2040.0	151.96	67.57%	6969.15	2.17
LD-RC4276-1897	220~350	331.2	14318	0.072	12189	0.574	1134.4	141.95	74.67%	7629.09	3.45

LD-RC4276(7712RC)

应用：吸尘器，电动工具等

DC MOTOR

Application: Vacuum cleaner, Electric tool

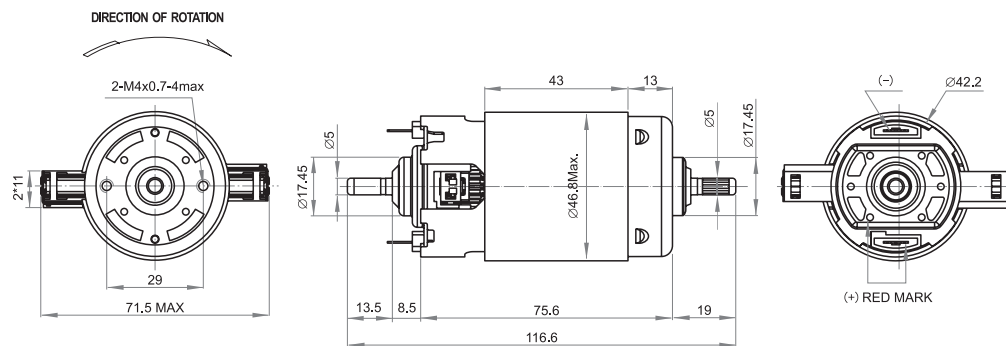


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-RC4276-1479	220V~350V	330	12672	0.169	10331	0.644	1369.80	145.28	68.36%	7414.83	2.74
LD-RC4276-1392	220V~350V	331.2	10335	0.086	7256	0.718	2040.00	151.96	63.90%	6847.48	2.21

LD-RC5285(997RC)

应用：电动工具等

DC MOTOR

Application: Electric tool

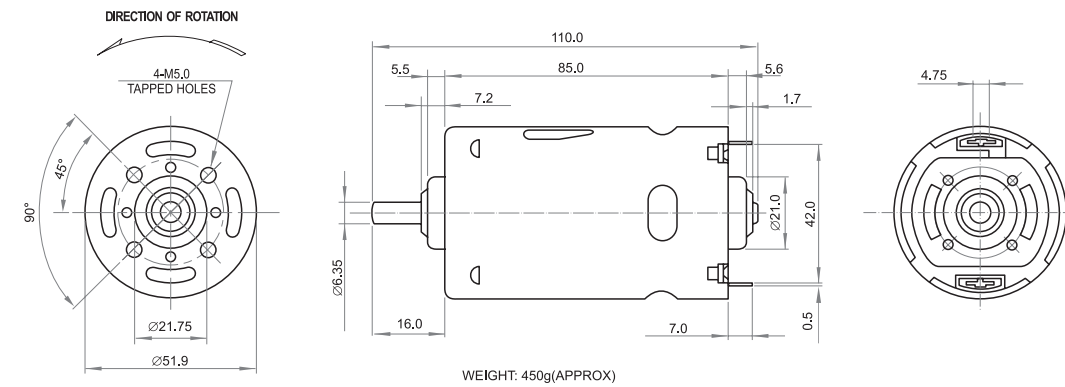


MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-997RC	6~15	12.0V	2450	0.40	2090	2.37	882.3	18.9	66.46%	5880	13.5
LD-997RC-1	6~15	12.0V	5350	0.93	4550	5.48	936.0	43.7	66.45%	6243	31.2

LD-6088RCK12

应用：水泵等

DC MOTOR

Application: Water pump

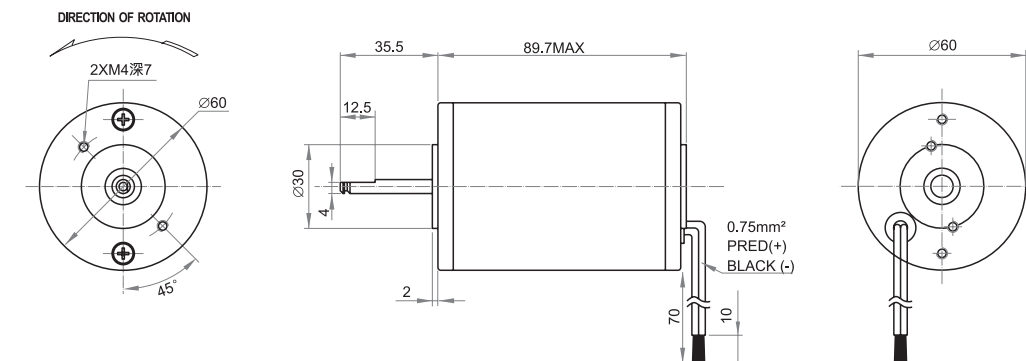

MODEL	VOLTAGE		NO LOAD		AT MAXIMUM EFFICIENCY					STALL	
	OPERATING RANGE	NOMINAL	SPEED	CURRENT	SPEED	CURRENT	TORQUE	OUTPUT	EFFICIENCY	TORQUE	CURRENT
	V	V	rpm	A	rpm	A	gcm	W	%	gcm	A
LD-6088RCK12	10~14	12.0	6511	1.62	5418	8.03	1054.45	58.65	60.85%	6282.13	39.82

DC MOTOR

[illegible][illegible]

DC MOTOR

[illegible]